381167286 DATA SHEET

Valid from: 09.07.2025 EPIC® H-K 006.2/12 MAS 6-10



Description

- 6 + 12 Pin inserts for harnessing
- Suitable for the general machineryand plant engineering, renewable energy and plastic industy
- 6 power contacts12 Signal contacts



Images may vary

General Characteristics

Series H-K 6.2/12

Version Male

Design Size 16B

Number of Contacts 18 + PE

Number of Power Contacts 6

Number of Signal Contacts 12

Termination Method Power Axial Screw termination: 6–10 mm²
Termination Method Signal Screw termination: 0.2–2.5 mm²

Temperature Range -40°C up to +125°C

Mechanical Characteristics

Cycle of mechanical operation ≥ 500

Tightening torque power contact screw 1,5 Nm @ 2,5, 4 mm²

2 Nm @ 6, 10 mm²

Tightening torque signal contact screw 0.8 Nm

Stripping length power contact 4-6 mm @ 2,5, 4 mm 2 7-9 mm @ 6, 10 mm 2

Stripping length signal contact 7.5 mm

Electrical Characteristics

Rated voltage Power, IEC	690 V
Rated Impulse Voltage Power	6 kV
Rated Current Power, IEC	40 A
Contact Resistance Power	≤ 0,5 m Ω
Rated voltage conductor-earth Signal, IEC	230 V
Rated voltage conductor-conductor Signal, IEC	400 V
Rated Impulse Voltage Signal	4 kV
Rated Current Signal, IEC	10 A
Contact Resistance Signal	≤ 3 m Ω
Pollution degree Power/Signal	3

Creator:	TODV1/BU EPIC	Document: DB381167286EN	Dogo 1 of 2
Released:	THBO1/BU EPIC	Version: 00	Page 1 of 3

DATA SHEET

Valid from: 09.07.2025

381167286

EPIC® H-K 006.2/12 MAS 6-10



Materials and Surfaces


Contacts Copper alloy, hard-silver plated


Insulating Body PC Flammability Class according to UL 94 V-0

Standard

Safety Standard IEC 61984, IEC 60664-1

Technical Drawings

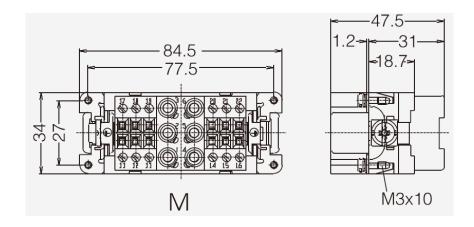

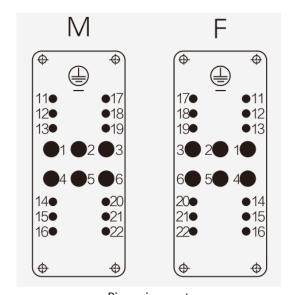

Pin assignment

Creator:	TODV1/BU EPIC	Document: DB381167286EN	Daga 2 of 2
Released:	THBO1/BU EPIC	Version: 00	Page 2 of 3

381167286 DATA SHEET

 $EPIC^{®} H-K 006.2/12 MAS 6-10$





Valid from:

09.07.2025



Industrial machinery and plant engineering



Temperature-resistant



Robust

Info

Combination Insert Power/Signal

Application range

Machine building, Mechanical engineering, renewable energy, plastic industry

Remark

Photographs are not to scale and do not represent detailed images of the respective products.