381167288 DATA SHEET



Valid from: 10.07.2025 EPIC® H-K 006.2/12 FAS 6-10

Description

- 6 + 12 Pin inserts for harnessing
- Suitable for the general machineryand plant engineering, renewable energy and plastic industy
- 6 power contacts12 Signal contacts



Images may vary

General Characteristics

SeriesH-K 6.2/12VersionFemaleDesign Size16BNumber of Contacts18 + PENumber of Power Contacts6Number of Signal Contacts12

Termination Method Power Axial Screw termination: 6 - 10 mm²
Termination Method Signal Screw termination: 0.2-2.5 mm²

Temperature Range -40°C up to +125°C

Mechanical Characteristics

Cycle of mechanical operation ≥ 500

Tightening torque power contact screw 1,5 Nm @ 2,5, 4 mm²

2 Nm @ 6, 10 mm²

Tightening torque signal contact screw 0.8 Nm

Stripping length power contact 4-6 mm @ 2,5, 4 mm²

7-9 mm @ 6, 10 mm²

Stripping length signal contact 7.5 mm

Electrical Characteristics

Rated voltage Power, IEC	690 V
Rated Impulse Voltage Power	6 kV
Rated Current Power, IEC	40 A
Contact Resistance Power	≤ 0,5 mΩ
Rated voltage conductor-earth Signal, IEC	230 V
Rated voltage conductor-conductor Signal, IEC	400 V
Rated Impulse Voltage Signal	4 kV
Rated Current Signal, IEC	10 A
Contact Resistance Signal	\leq 3 m Ω
Pollution degree Power/Signal	3

Creator:	TODV1/BU EPIC	Document: DB381167288EN	Dogo 1 of 2
Released:	THBO1/BU EPIC	Version: 00	Page 1 of 3

DATA SHEET

Valid from: 10.07.2025

381167288

EPIC® H-K 006.2/12 FAS 6-10



Materials and Surfaces


Contacts Copper alloy, hard-silver plated


Insulating Body PC Flammability Class according to UL 94 V-0

Standard

Safety Standard IEC 61984, IEC 60664-1

Technical Drawings

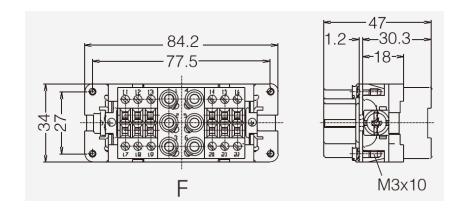

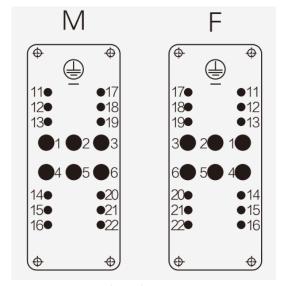

Pin assignment

Valid from: DATA SHEET

EPIC® H-K 006.2/12 FAS 6-10





10.07.2025



Industrial machinery and plant engineering



Temperature-resistant



Robust

Info

Combination Insert Power/Signal

Application range

Machine building, Mechanical engineering, renewable energy, plastic industry

Remark

Photographs are not to scale and do not represent detailed images of the respective products.